

INSTALLATION INSTRUCTIONS FBB21 BLOWER

AUTO VARIABLE-SPEED-TWIN


FOR USE ON: DVCT(36,40,50) SERIES FIREPLACES

⚠ CAUTION

Sharp edges. Use protective gloves when installing.

Bench Installation

1. Remove Blower Access Panels. **See Figure 1.**

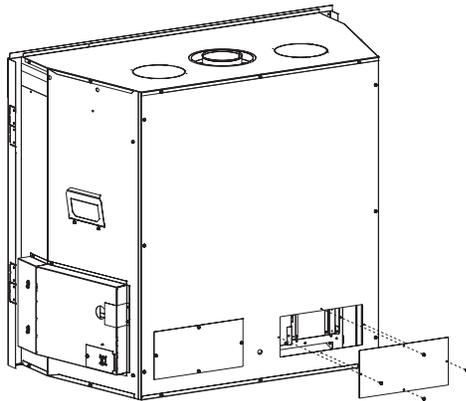

DVCT40 SHOWN
Figure 1

2. Place Blower onto blower brackets. **See Figure 2.**

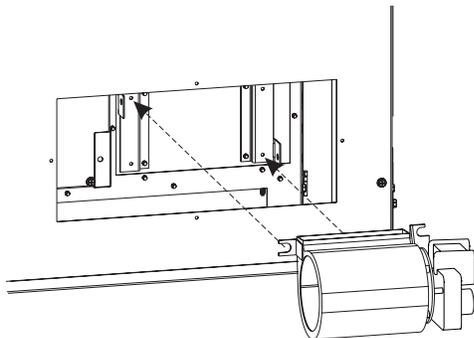


Figure 2

3. Hand bend tab as shown in **Figure 3** and secure with (2) screws.

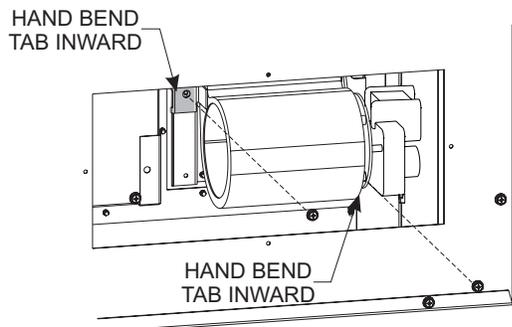


Figure 3

4. Remove protective connectors on Wire Assembly from fireplace and discard. Connect Wire Harness to both blowers and the other end to the Wire Assembly supplied with the fireplace. **See Figure 4.**

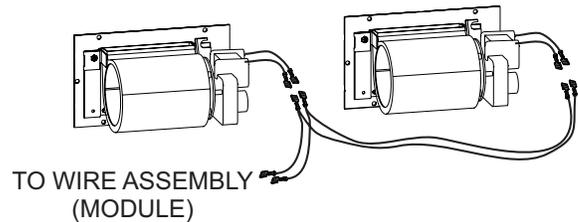


Figure 4

5. Replace Blower Access Panels removed in step 1. **See Figure 1.**

Installation After Placement of Unit in Wall

1. Remove the following items: **See Figure 5.**
 - Screen barrier (*See Homeowner's Manual, Maintenance and Service.*)
 - Glass Frame Assembly (*See Homeowner's Manual, Maintenance and Service.*)
 - Liners (*See separate liner instruction document.*)


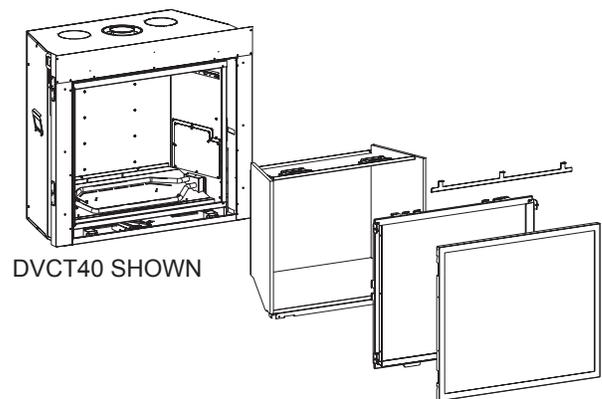


Figure 5


2. Remove front and rear burner. **See Figure 6.**

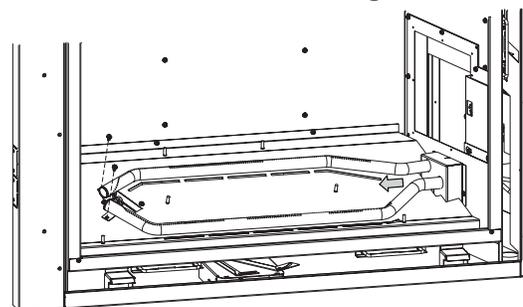

DVCT40 SHOWN

Figure 6

- Remove burner base. See **Figure 7**.

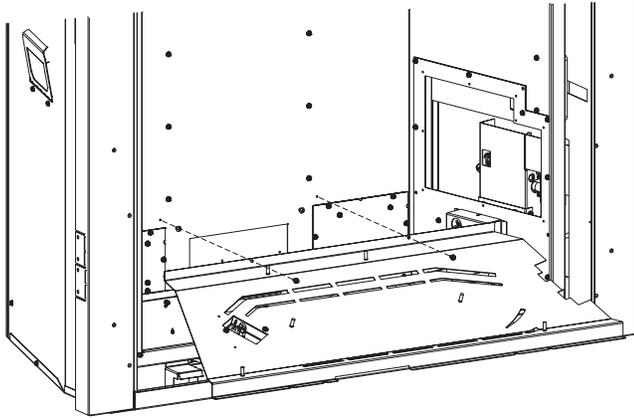

DVCT40 SHOWN **Figure 7**

- Remove Blower Access Plates by taking out (6) screws each. See **Figure 8**.

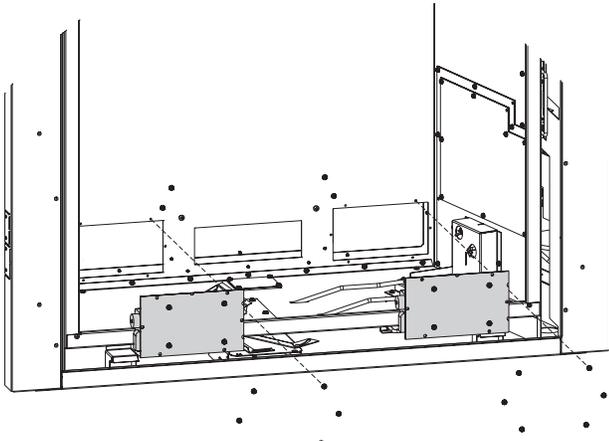


Figure 8

- Place Blower onto blower brackets. See **Figure 9**.

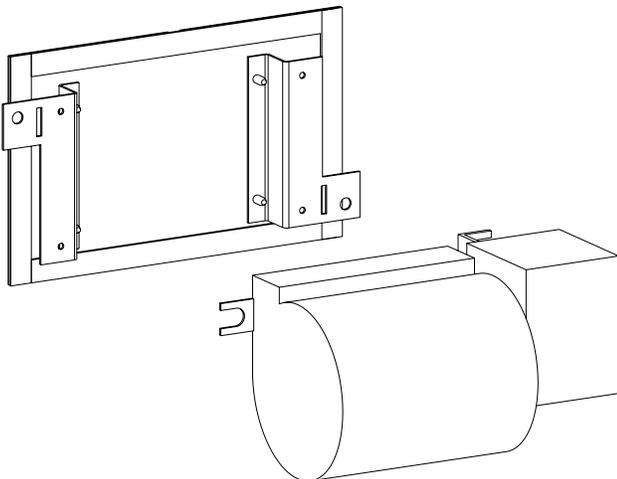


Figure 9

- Hand bend tab as shown in **Figure 10** and secure with (2) screws.

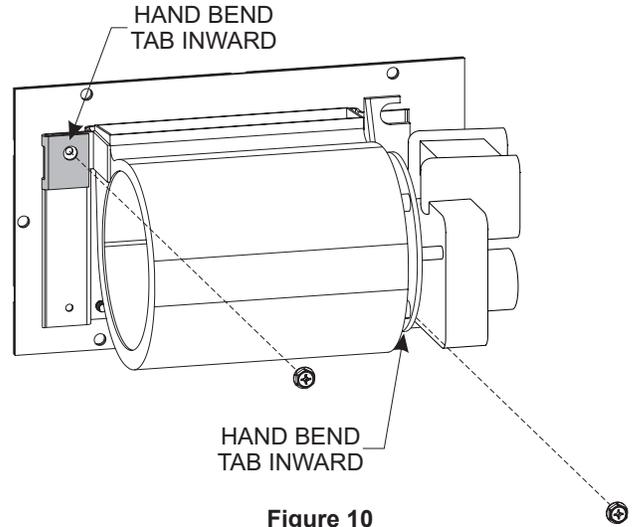


Figure 10

- Remove protective connectors on Wire Assembly from fireplace and discard. Connect Wire Harness to both blowers and the other end to the Wire Assembly supplied with the fireplace. See **Figure 11**.

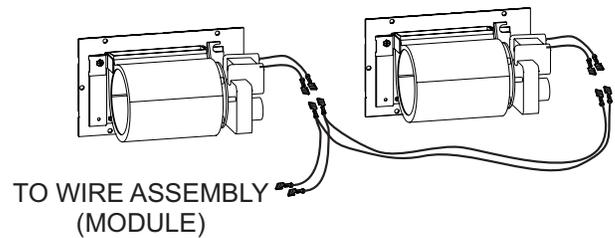


Figure 11

- Replace Blower Access Plates with (6) screws each. See **Figure 12**.

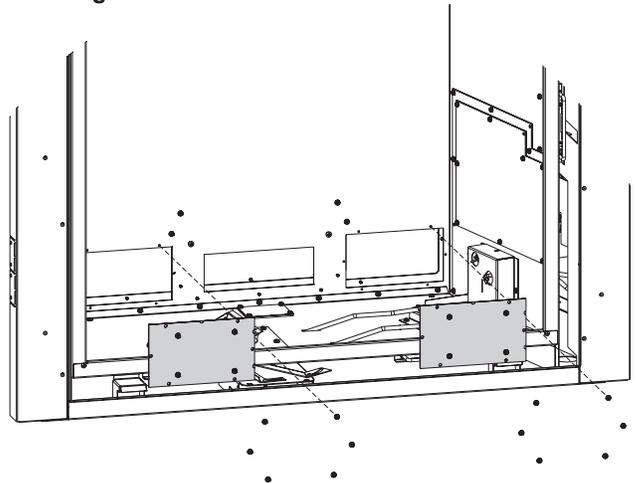


Figure 12

- Replace burner base and burners removed in steps 2 and 3. See **Figures 6 and 7**.
- Replace Screen Barrier, Glass Frame, and liners removed in Step 1. See **Figure 5**.